


EXTERIOR CLEANING & SEALANT
 SHAPED AREAS INDICATE SECTIONS OF EXISTING VENEER WHICH HAS MOULD OR OTHER BUILD UP. CONTRACTOR SHALL REMOVE MASH ALL MOULD OR OTHER BUILD UP PRIOR TO BIDDER'S WORK. CONTRACTOR SHALL PROVIDE CP-500W WATER REPELLANT AS MANUFACTURED BY CHEMICAL PRODUCTS INDUSTRIES, INC. IN OKLAHOMA CITY, OKLAHOMA 800-624-4860 (PHONE) ON ALL EXISTING MASONRY SURFACES INCLUDING ALL BRICK CONCRETE STEEL WALL BELOW BRICK COURSES INCLUDING ALL FIELD VENEER. ALL EXISTING CONDITIONS PRIOR TO BIDDING TYPICAL.

ESTIMATED QUANTITIES, (FIELD VERIFY PRIOR TO BIDDING)
 AREAS TO BE CLEANED: 3500 sq. ft.
 AREAS TO RECEIVE CP-500W: 4200 sq. ft.

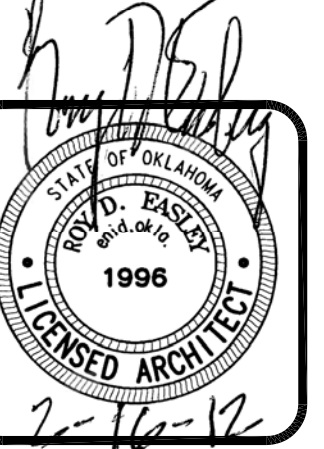

Easley Associates Architects
 225 N. Independence

**WINDOW REPLACEMENT & INTERIOR IMPROVEMENTS TO
 CARVER EDUCATION CENTER**

815 SOUTH 5TH
 INDEPENDENT SCHOOL DISTRICT NO. 57
 500 SOUTH INDEPENDENCE ENID, OKLAHOMA



DATE: FEBRUARY 16, 2012
 REV.: