

LIGHT FIXTURE SCHEDULE					
MARK	MANF. CAT. #	LAMP	VOLTAGE	MOUNTING	DESCRIPTION
A	LITHONIA 2PM3-G-3-32-32-LD	3 32W-T8	120	LAY-IN	2x4 LAY-IN, 3 LAMP, 3" 32 CELL PARABOLIC ELECTRONIC BALAST.
AE	LITHONIA 2PM3-G-3-32-32-LD-EL	3 32W-T8	120	LAY-IN	SAME AT TYPE A EXCEPT WITH EMERGENCY BALLAST BODINE B33 OR EQUAL.
D	LITHONIA C-1-32	1 32W - T8	120	SURFACE	4FT STRIP, MOUNT IN COVE, 1 LAMP ELECTRONIC BALAST.
F	LITHONIA LF8N-2/26TRT-F803AZ	2 26W TRT	120	RECESSED	8" RECESSED CAN, HORIZONTAL LAMP CLEAR SEMI-SPECULAR REFLECTOR
FE	LITHONIA LF8N-2/26TRT-F803AZ-EL	2 26W TRT	120	RECESSED	SAME AT TYPE F EXCEPT WITH EMERGENCY BALLAST 90 MINUTE BATTERY

1. ALL BALLASTS SHALL BE ELECTRONIC WITH 10% THD.
 2. ALL FLOURESCENT LAMPS SHALL BE CR1080, 4100 K.
 3. PROVIDE 3/4"X3/4"X1/2" EGGRATE LOUVER BELOW TYPE B AND D FIXTURES IN SOFFIT.
 4. CONNECT TYPE AE TO BE SWITCHED AND SERVE AS EMERGENCY LIGHTS.


- LIGHTING GENERAL NOTES**
- DEMOLISH EXISTING LIGHTS, CEILING FANS, AND ASSOCIATED ELECTRICAL IN ROOMS RECEIVING NEW LIGHTS.
 - RECONNECT NEW LIGHTS TO EXISTING CIRCUITS SERVING EXISTING DEMOLISHED LIGHTS IN ROOMS.
 - PROVIDE NEW TOGGLE SWITCHES IN EXISTING SWITCH LOCATIONS WHERE POSSIBLE. PROVIDE STAINLESS STEEL PLATES.
 - CONNECT LIGHTS SUCH THAT ROW OF LIGHTS AT SMARTBOARD WALL ARE ON SEPARATE SWITCH FROM REMAINDER OF LIGHTS. CONFIRM SMARTBOARD LOCATION PRIOR TO WIRING OF LIGHTS.
 - CONNECT LIGHTS TO BE CONTROLLED VIA CEILING MOUNTED OCCUPANCY SENSOR IN EACH ROOM. LOCATE SENSOR PER MANUFACTURER'S RECOMMENDATIONS TO PROVIDE COVERAGE OF ROOM.
 - FOR NEW EXTERIOR CANOPY LIGHTS, PROVIDE PHOTOCELL AND WIRE THROUGH PHOTOCELL.



1 LIGHTING PLAN
 E11 1/8" = 1'-0"

Easley Associates Architects
 223 N. Independence
 Enid, OK

2012 ALTERATIONS TO
MONROE ELEMENTARY SCHOOL
 400 WEST COTTONWOOD
 INDEPENDENT SCHOOL DISTRICT NO. 57
 500 SOUTH INDEPENDENCE ENID, OKLAHOMA

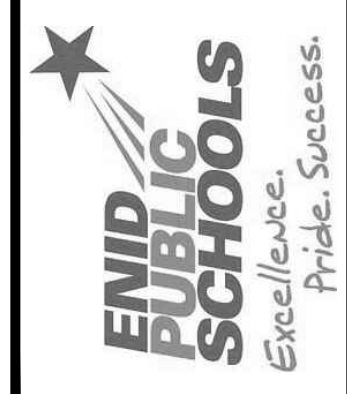

DATE: 02/04/2012
 REV.: